



COOLPIX

At the heart of the image



- 7.1 megapixels
- 3x zoom
- 2.5-inch LCD
- VR image stabilization
- AA-size battery compatible
- One-touch portrait button
- ISO 1600 capability



COOLPIX L12

www.nikon-coolpix.com

Stay simple. Stay sharp. Stay satisfied.

7.1 effective megapixel clarity

An impressively high megapixel count delivers pictures with true-to-life color and high-level detail. What's more, it means images can be significantly enlarged, yet still look absolutely stunning.


VR image stabilization

Shooting with lens shift VR is like shooting three shutter speeds faster. Not only does it do away with the problem of camera shake, it also produces sharper images on the LCD that make it easier to capture the right moment.



Anti-Shake button – 3 advantages at a touch

A press of a button is all it takes to overcome camera shake – activating lens shift VR, High-Sensitivity mode and BSS (Best Shot Selector) all at once to produce shots that are steady, sharp and much more satisfying.

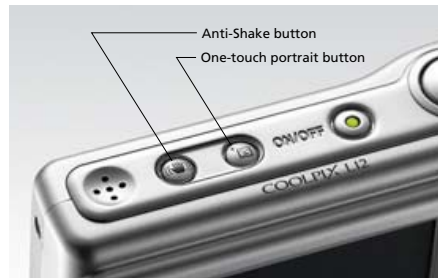

One-touch portrait button takes satisfaction further

Add a touch of genius to your photography. A handy standalone button provides easy, direct access to three unique Nikon image innovations – Face-priority AF* that places the focus where you need it, In-Camera Red-Eye Fix for better flash photography, and D-Lighting that corrects exposure after the fact.

* Face recognition capability may be limited in some shooting conditions.

AA-size battery compatible for power replenishment anywhere

Compatibility with AA-size batteries, which are widely available around the world, means users can go on shooting virtually anywhere without worrying about recharging or running out of power.

ISO 1600 capability extends shooting into low light

Accurately measuring available light, the COOLPIX L12 automatically selects the best sensitivity setting. And with an impressive sensitivity range up to ISO 1600, it's easy to take great-looking pictures in low light conditions.

Other features

- 2.5-inch LCD
- PictBridge compatible
- ImageLink compatible



Nikon COOLPIX L12 Specifications

Effective pixels:	7.1 million
Lens:	3x Zoom-Nikkor; 5.7-17.1mm (35mm [135] format picture angle: 35-105mm); f/2.8-4.7; 5 elements in 5 groups; Digital zoom: up to 4x (35mm [135] format picture angle: 420mm)
Focus range (from lens):	50cm (1 ft. 8 in.) to infinity (∞), Macro close-up mode: 15cm (5.9 in.) to infinity (∞)
Monitor:	2.5-in., 115,000-dot, TFT LCD with anti-reflection coating
Storage media:	Internal memory (approx. 21 MB), SD memory cards
ISO sensitivity:	Auto (auto gain ISO 50-1600)
Power sources:	Two AA alkaline, oxyride, or lithium batteries, two EN-MH1 rechargeable NiMH batteries (optional), EH-65A AC adapter (optional)
Battery life:	Approx. 150 shots with alkaline, 600 shots with lithium, or 370 shots with EN-MH1 batteries (based on CIPA standard)
Dimensions (WxHxD):	Approx. 91 x 61 x 26 mm (3.6 x 2.4 x 1.0 in.) excluding projections
Weight:	Approx. 125 g (4.4 oz.) without battery and SD memory card

PictureProject System Requirements

OS: **Macintosh:** Mac® OS X version 10.3.9, 10.4.x
Windows: Windows® Vista (32bit), Windows® XP Home Edition/Professional, Windows® 2000 Professional pre-installed models

Note: CD-ROM drive required for installation. Only built-in USB ports are supported

Microsoft® and Windows® are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Macintosh® and QuickTime® are either registered trademarks or trademarks of Apple Computer Inc. in the United States and/or other countries. The SDHC logo is a trademark. ImageLink and the ImageLink print system logo are trademarks of Eastman Kodak Company. PictBridge is a trademark. D-Lighting technology is provided by Apical Limited. Products and brand names are trademarks or registered trademarks of their respective companies. The FotoNation logo is a trademark. Image on LCD shown in this brochure is simulated.

Specifications and equipment are subject to change without any notice or obligation on the part of the manufacturer. February 2007 ©2007 NIKON CORPORATION



WARNING TO ENSURE CORRECT USAGE, READ MANUALS CAREFULLY BEFORE USING YOUR EQUIPMENT. SOME DOCUMENTATION IS SUPPLIED ON CD-ROM ONLY.



NIKON CORPORATION
 Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku
 Tokyo 100-8331, Japan
<http://nikonimaging.com/>

Nikon Hong Kong Ltd. Suite 1001, 10/F Cityplaza One, 1111 King's Road, Taikoo Shing, Hong Kong www.nikon.com.hk
Nikon Singapore Pte. Ltd. No. 80 Anson Road, Fuji Xerox Towers, #10-01/02, Singapore 079907 www.nikon.com.sg
Nikon (Malaysia) Sdn. Bhd. 11th Floor, Block A, Menara PKNS, No. 17, Jalan Yong Shook Lin, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia www.nikon.com.my
NIKON AUSTRALIA PTY LTD. Unit F1, Lidcombe Business Park, 3-29 Birnie Avenue, Lidcombe NSW 2141, Australia www.nikon.com.au