



At the heart of the image

SLR CAMERA

F M 10



THE ART OF SIMPLICITY



*Zoom-Nikkor 35-70mm f/3.5-4.8
70mm setting 1/125 sec. at f/8*



Nikon FM10

The key to unlocking your creative potential.

With photography, you can express your feelings about the world around you. And what better way to do this than with the Nikon FM10. This compact single-lens reflex goes far beyond point-and-shoot cameras. It provides a crystal-clear image, as seen through the lens, so there are no surprises after the film is developed. And manual focus and manual exposure put you in complete control. The FM10 is also packed with "professional-type" features, allowing you to take the pictures you've always wanted. Go ahead, express yourself! It's easy with the FM10.

Stop the action!



A top shutter speed of 1/2000 sec.

“Freeze” fast-moving subjects, when the action reaches its peak. At a short 1/2000 sec., you can. Or use a slow shutter speed to blur the movement.



Change the composition



At 35mm





At 70mm

Versatile Zoom-Nikkor 35-70mm lens

It's easy to vary the composition and the pictures you get will be so sharp and clear, they'll take your breath away. This superb Nikkor zoom comes with the FM10 kit.



You're in control

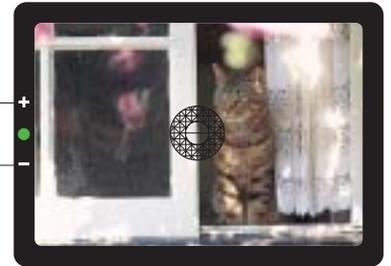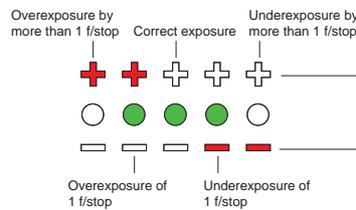

LED viewfinder information

Bright LEDs in the viewfinder light up to show if your shots are correctly exposed. Intentional over- or underexposures are also easy by varying the aperture or shutter speed.

From near to far



Shallow depth of field

Deep depth of field



Depth-of-field preview lever

Visualize what's sharp from near to far before you take the picture. Then decide to keep both foreground and background sharp for landscapes, or isolate the main subject against a blurred background for portraits or pictures of flowers.



Capture the night



B setting

When the light grows dim, the FM10 really shines. At “B” (BULB), fantastic twilight or night scenes can be captured with exquisite color and detail. Use of an optional Nikon cable release is recommended.

Double the fun



Multiple exposure lever

Want to create imaginative, dream-like effects? Try shooting several images on the same frame of film.




Portable sunshine



Optional Nikon Speedlights

Birthdays, parties, weddings—the memorable moments of your life. Choose from a variety of Nikon Speedlights, including the SB-800. These flashes can also fill in shadows of backlit subjects in bright sun or be used outside at night.

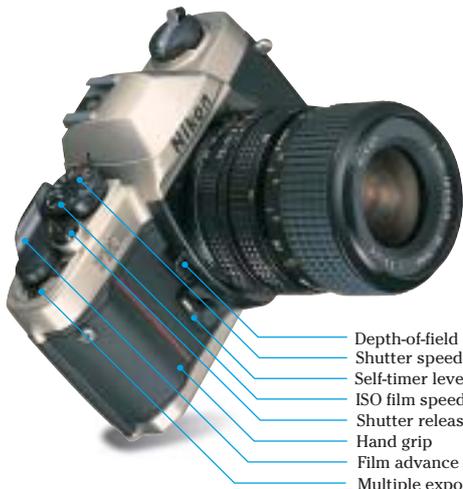

- Depth-of-field preview lever
- Shutter speed dial/ISO selector ring
- Self-timer lever
- ISO film speed indicator
- Shutter release button
- Hand grip
- Film advance lever
- Multiple exposure lever

Wide range of Nikkor lenses

The FM10's Nikon F mount accepts a vast array of Nikkor lenses, including the latest D-type AF Nikkor[®] lenses, to broaden your photographic horizons.

*G-type Nikkor, IX-Nikkor and DX Nikkor lenses cannot be used.

D-Type AF Nikkor Lenses

Zoom	Normal	Special Purpose
AF S 17-35mm f/2.8D IF-ED	AF 24mm f/2.8D	AF DC 135mm f/2D
AF 18-35mm f/3.5-4.5D IF-ED	AF 28mm f/2.8D	AF 180mm f/2.8D IF-ED
AF 24-85mm f/2.8-4D IF	AF 35mm f/2D	AF-S 300mm f/4D IF-ED
AF-S 28-70mm f/2.8D IF-ED	Normal	AF-S 400mm f/2.8D IF-ED II
AF 80-200mm f/2.8D ED	AF 50mm f/1.4D	AF-S 500mm f/4D IF-ED II
AF VR 80-400mm f/4.5-5.6D ED	AF 50mm f/1.8D	AF-S 600mm f/4D IF-ED II
AF-S VR 200-400mm f/4G IF-ED	Telephoto	
	AF 85mm f/1.4D IF	AF Fisheye 16mm f/2.8D
Wideangle	AF 85mm f/1.8D	AF Micro 60mm f/2.8D
AF 14mm f/2.8D ED	AF DC 105mm f/2D	AF Micro 200mm f/4D IF-ED
AF 20mm f/2.8D		

Manual-Focus Nikkor Lenses

Wideangle	Special Purpose
20mm f/2.8	PC Micro 85mm
24mm f/2.8	f/2.8D
28mm f/2.8	Micro 55mm f/2.8
35mm f/1.4	Micro 105mm f/2.8
Normal	
50mm f/1.2	
50mm f/1.4	

Zoom-Nikkor 35-70mm f/3.5-4.8



Zoom-Nikkor 35-70mm f/3.5-4.8

Focal length, max. aperture	35-70mm, f/3.5-4.8
Min. shooting distance	0.4m
Attachment size	52mm
Dimensions and weight	Approx. ø63mm x 64mm (dia. x extension). Approx. 200g

All specifications apply when fresh batteries are used, at normal temperature (20°C). Specifications and design are subject to change without any notice or obligation on the part of the manufacturer.
© 1996-2006 NIKON CORPORATION



WARNING

TO ENSURE CORRECT USAGE, READ MANUALS CAREFULLY BEFORE USING YOUR EQUIPMENT.



NIKON CORPORATION

Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku,
Tokyo 100-8331, Japan
<http://nikonimaging.com/>

Nikon FM10 specifications

Type of camera	35mm single-lens reflex (SLR) focal plane shutter camera
Picture format	24 x 36mm (standard 35mm [135] film format)
Lens mount	Nikon F bayonet mount (IX-Nikkor, DX Nikkor and G-type Nikkor lenses cannot be used)
Exposure metering	TTL center-weighted
EV range	EV2 to 19 (ISO 100)
Exposure control	Manual
Film sensitivity range	ISO 25 to 3200 (manual setting)
Multiple exposures	Possible
Shutter	Vertical-travel, metal focal plane shutter
Shutter speed settings	B, 1 to 1/2000 sec.
Viewfinder	Fixed eye-level pentaprism type, Diopter: standard -1 m ⁻¹ (optional diopter adjustment adapters can be attached)
Viewfinder information	LED exposure displays using - (under), ○ (correct), and + (over) signs
Focusing screen	Fixed (split-image micropism, matte field)
Frame coverage	Approx. 92% (with 50mm lens set at infinity)
Magnification	0.84x (with 50mm lens set at infinity)
Depth-of-field preview	Available
Film advance/rewind	Manual
Frame counter	Additive type, automatically resets to S when camera back is opened.
Self-timer	Mechanical self-timer, approx. 10-sec. shutter release delay
Flash synchronization	X sync only (1/125 sec. or slower)
Accessory shoe	Standard ISO-type hot shoe contact
Power source	1.5V SR44 x 2 or 1.5V LR44 x 2
Dimensions	Approx. 139(W) x 86(H) x 53(D) mm
Weight	Approx. 420g (without batteries)

Note: The FM10 kit includes the camera body, a 35-70mm f/3.5-4.8 zoom lens, a camera case and a strap.



- Focus ring
- Zoom ring
- Accessory shoe/hot shoe contact
- Exposure meter button
- Lens release button
- Film rewind crank/camera back lock lever

Nikon Speedlight SB-800

The Speedlight SB-800 (optional) gives you countless flash possibilities.

Guide number (ISO 100, m)	38 (with zoom head set at 35mm)
Angle of coverage	24mm to 105mm (14mm with built-in wide-flash adapter)
Dimensions	Approx. 70.5 x 129.5 x 93.0mm
Weight	Approx. 350g (without batteries)



SB-800

Other Nikon accessories

A variety of other Nikon SLR accessories are available to expand your photographic system; these include close-up equipment (close-up attachment lenses, cable releases such as AR-3, etc.) and various types of filters.